

Part Number: BMW-F9XR-20(E)
Description: Dual Saddle
Fitment: 2020-2021 BMW F900XR
Revision: 1



| Tools Required | Parts List |
|---|---|
| Needlenose Pliers Phillips Screwdriver | 1 #CB-PWR-HRN-36=12" Wiring Harness / pigtail 1 #FACC-05 Small Fuse Adapter 1 Small Fuse Box Rain Cover 1 6" Zip Tie |

1. Begin by removing the stock seat (refer to owner's manual).
2. Saddle mounts just like stock with brackets preinstalled on the saddle.
3. To install your Dual Saddle, slip the front tongue of your saddle under the rear of the gas tank, align the Corbin locking pin to the stock locking mechanism and push down on the saddle until you hear the lock click. (Figure 1)



FIG 1

HEATER INSTALLATION:

1. If you ordered the heated model, we also included a wiring pigtail that hooks into your stock fusebox, so start by unlatching the fusebox (Figure 2).
2. Remove the 7.5 amp fuse and insert the fuse into the adapter at the end of the wiring pigtail (Figure 3).
3. Insert the adapter into the fusebox in the space previously occupied by the Accessory fuse (Figure 4).
4. With the pigtail in place, the stock fuse cover will not fit, so slip the fuse adapter through the small hole on the provided rain cover and loosely cover the entire fuse plug (Figure 5).
5. Connect wiring adapters together (Figure 6).



FIG 2

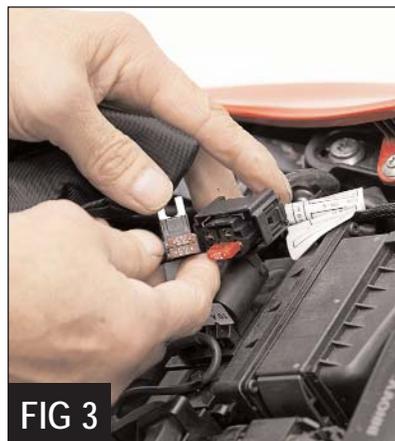


FIG 3

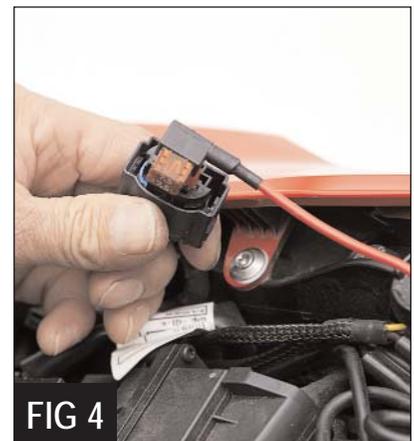


FIG 4

6. Find a convenient place to ground the negative lead of the pigtail to your chassis. We went right to the battery as shown in *Figure 7*, but any location with good contact to ground will work fine.

7. Bundle loose wiring and secure with the included zip tie (*Figure 8*). Do not tighten excessively or you may damage the wiring... just secure it in place for cleanliness.

8. Plug the wiring harness into the seat and test. To do this, just flip the switch on the saddle. If the switch illuminates, the saddle heater is working.

9. Proceed with saddle mounting as outlined above.

Enjoy your new saddle!

NOTE: The heater is controlled by the switch along the side of the saddle. The temperature is regulated by an internal thermostat when the heater switch is turned on.



FIG 5



FIG 6

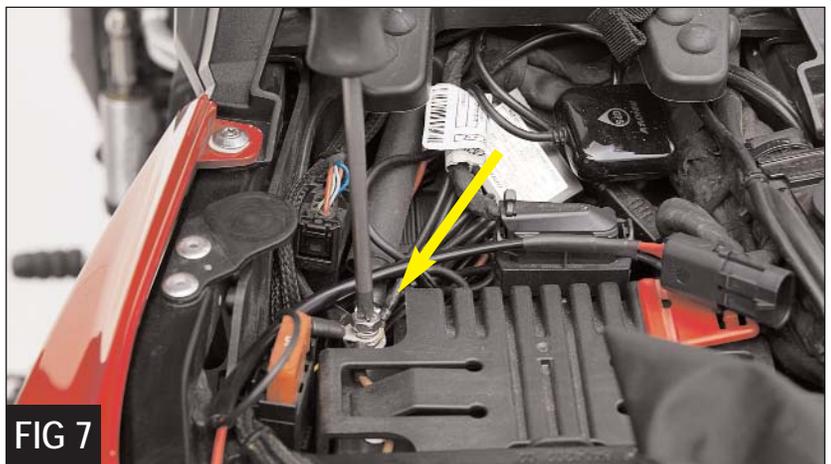


FIG 7



FIG 8

Questions? Give us a holler...
800-223-4332
tech@corbin.com