

Part Number: HD-ST-6-G, HD-ST-6-YG & HD-ST8-200-YG

Description: Gunfighter & Young Guns Saddles

Fitment: 2006-2009 Harley-Davidson Softail


Revision: 2



Tools Required	Parts List
7/16 Open Wrench 5/32 Allen Key	1 #P00537 Latch pin 1 #P00545 Nylon cap


NOTE: We recommend the use of Loctite® or similar thread lock compound when assembling parts on your motorcycle.

1. Referring to your owner's manual if needed, start by removing the stock seat from your motorcycle.
2. The seat installs by screwing the supplied #P00537 latch pin and #P00545 nylon cap (Figure 1) into the center thread nut of the rear fender (Figure 2).
3. Now you're ready to install your saddle. Slip the adjustable mounting front tongue into the slot by the gas tank (Figure 2). Center the rear of the saddle over the pin then press firmly down, right over the pin position as it "clicks" into place (should click twice). The rear of the seat should be snug to the fender. Double check the installation by pulling up on the rear of the seat, making sure it's secure.

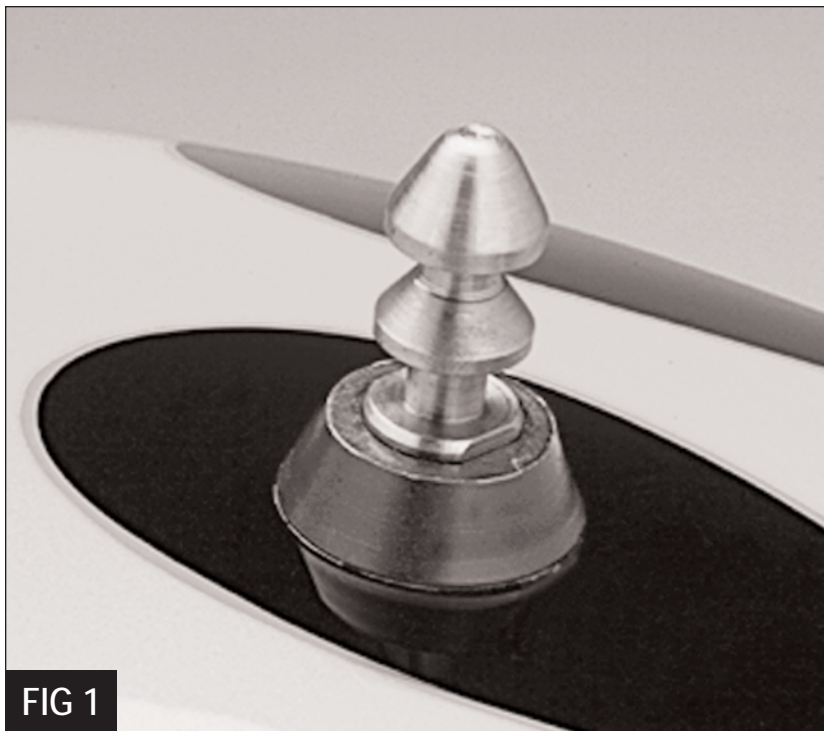

4. To remove the saddle, insert the key into the lock system, turn the key clockwise and pull it up from the rear. If the key seems a bit stiff to turn, push down on the seat over the locking system, to assist the seat as the rubber grommets are new and need time to break in.

NOTE: If the front of the seat is a little loose and has some play, or is a bit too snug. The front tongue can be adjusted as needed by loosening the allen bolts and moving the bracket up or down.

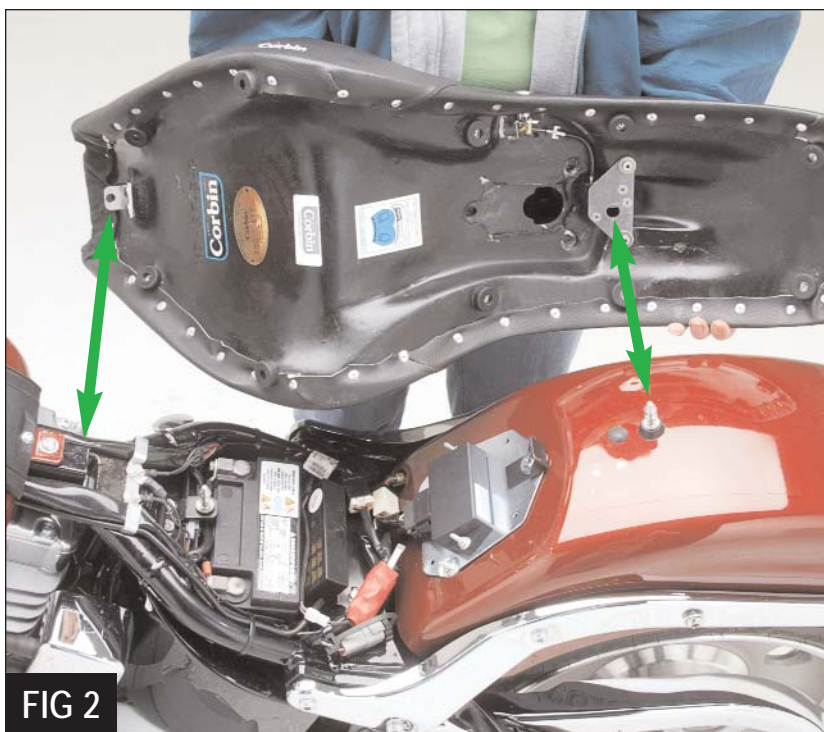

Questions? Give us a holler...
800-223-4332
tech@corbin.com