

**Part Number:** Y-TRC-21-GL(E)  
**Description:** Gunfighter & Lady Saddle  
**Fitment:** 2021-2022 Yamaha Tracer 9 GT  
**Revision:** 1



Tools Required	Parts List
Needlenose Pliers Phillips Screwdriver	1 #CB-PWR-HRN-36=12" Wiring Harness / pigtail 1 #FACC-05 Small Fuse Adapter 1 Small Fuse Box Rain Cover 1 6" Zip Tie

1. Begin by removing the stock seat (refer to owner's manual).
2. Remove the rubber release block (*Figure 1*). Set it aside. It will not be needed for saddle installation.
3. Put the Yamaha adjustment bracket into the lowest position.
4. Remove the rubber nose spacer (*Figure 2*). Set it aside. It will not be needed for saddle installation.
5. Saddle mounts just like stock with brackets preinstalled on the saddle.
6. To install your Gunfighter & Lady Saddle, slip the front tongue of your saddle under the rear of the gas tank, align the Corbin latch to the stock locking mechanism and push down on the saddle until you hear the lock click.



#### HEATER INSTALLATION:

1. If you ordered the heated model, we also included a wiring pigtail that hooks into your stock fuse box, so start by unlatching the fuse box.
2. Remove the 7.5 amp Signal fuse and insert the fuse into the adapter at the end of the wiring pigtail (*Figure 3*).



3. Insert the adapter into the fuse box in the space previously occupied by the Accessory fuse (*Figure 4*).

4. With the pigtail in place, the stock fuse cover will not close, so slip the fuse adapter through the small hole on the provided rain cover and loosely cover the entire fuse box (*Figure 5*).

5. Attach the ground wire to the negative terminal on the battery (*Figure 6*), using a Phillips screwdriver.

6. Connect wiring adapters together (*Figure 7*).

7. Bundle loose wiring and secure with the included zip tie. Do not tighten excessively or you may damage the wiring... just secure it in place for cleanliness.

8. Plug the wiring harness into the seat and test. To do this, just flip the switch on the saddle. If the switch illuminates, the saddle heater is working.

9. Proceed with saddle mounting as outlined above.

Enjoy your new saddle!

**NOTE:** The heater is controlled by the switch along the side of the saddle. The temperature is regulated by an internal thermostat when the heater switch is turned on.

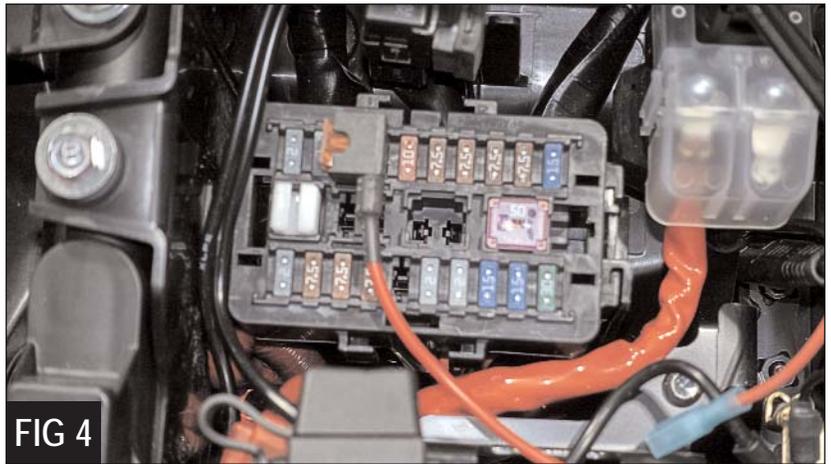


FIG 4



FIG 5



FIG 6



FIG 7

Questions? Give us a holler...  
**800-223-4332**  
tech@corbin.com